

# Thermo Scientific 410iQ


## Carbon Dioxide Analyzer



The Thermo Scientific™ 410iQ Carbon Dioxide (CO<sub>2</sub>) Gas Analyzer utilizes advanced Non-Dispersive Infrared (NDIR) optical filter technology to measure concentrations of CO<sub>2</sub>.

This analyzer utilizes advanced Non-Dispersive Infrared technology (NDIR) with optically fixed bandpass interference filters and quantum detection to analyze concentrations of CO<sub>2</sub>.

The 410iQ Gas Analyzer uses an internally stored calibration curve to accurately linearize the instrument output over any range up to a concentration of 10,000 ppm.

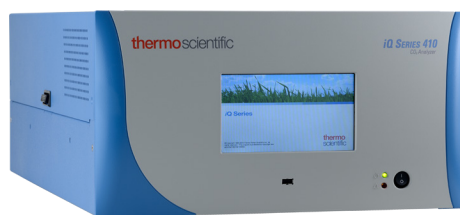

### Non-Stop Intelligence

- Predictive Diagnostics
- Proactive Communication
- Personal Device Connectivity

The Thermo Scientific iQ Series Gas Analyzer provides a smart environmental monitoring solution designed for reliability, easy operation and proactive maintenance. Get more control over your instrument's performance, costs, workflow and data availability.



The iQ companion app for the iQ Series Gas Analyzer delivers the ultimate in ease of use and smart engineering. The iQ app allows for remote monitoring of iQ gas analyzers, simplified ways of contacting us and instant access to product resources.

Download the iQ app at [thermofisher.com/iQapp](https://thermofisher.com/iQapp)

## Thermo Scientific 410iQ Carbon Dioxide Analyzer

Specifications	
Preset ranges	0-10,000 ppm
Zero noise	0.5 ppm RMS (60 second averaging time)
Detection limit	1.0 ppm (60 second averaging time)
Zero drift	±1.0 ppm (24 hour)
Span drift	±2.0% of reading (24 hour)
Response time	90 seconds (30 second averaging time)
Linearity	±1.5% of span (at concentrations of 10%–100% of span)
Flow rate	1.0 SLPM (1 atm inlet pressure)
Operating temperature	5°C to 45°C (may be safely operated over the range of 0-45°C)
Power requirements	100-240 VAC 50/60 Hz, 275 Watts
Size and weight	16.75" (W) × 8.72" (H) × 24" (D), 31.3 lbs. 425.45mm (W) × 221.48mm (H) × 609mm (D), 14.2 kg
Analog I/O	4 Isolated voltage inputs 0–10 V 6 Isolated analog voltages outputs, with 4 selectable ranges 6 Isolated analog current outputs, with 2 selectable ranges
Digital I/O	16 Digital inputs (TTL) 8 Solenoid driver outputs 10 Digital reed relay contact outputs
Serial ports	1 RS-232/485 port; 1 RS-485 external accessory port
Other ports	3 Full Speed USB ports (one in front, two in rear) 1 Gigabit ethernet port
Communication	MODBUS, Streaming, AK, Gesytec (Bayern-Hessen)
Approvals and Certifications	CE, TUV-SUD Safety

## Ordering information

### 410iQ Carbon Dioxide Analyzer

Choose from the following configurations/options to customize your own 410iQ Carbon Dioxide Analyzer

#### 1. Power Cord

A = 100-120 VAC 50/60 Hz (NA)

B = 220 VAC 50/60 Hz (CHN)

C = 220 VAC 50/60 Hz (EU)

#### 2. Communications

N = No I/O

A = Serial RS232/RS485

B = Analog and Digital

C = Serial, Analog and Digital

#### 3. Case Configuration

N = No Zero/Span Valve

A = Oxygen Sensor, No Zero Span Valve

B = Zero/Span Valve

#### Your Order Code: 410iQ -



To maintain optimal product performance, you need immediate access to experts worldwide, as well as priority status when your air quality equipment needs repair or replacement. We offer comprehensive, flexible support solutions for all phases of the product life cycle. Through predictable, fixed-cost pricing, our services help protect the return on investment and total cost of ownership of your Thermo Scientific products. For more information on our comprehensive service solutions visit [thermofisher.com/EMservice](http://thermofisher.com/EMservice)

#### USA

27 Forge Parkway  
Franklin, MA 02038  
Ph: (508) 520-0430  
Fax: (508) 520-2800  
[orders.aqi@thermofisher.com](mailto:orders.aqi@thermofisher.com)

#### India

C/327, TTC Industrial Area  
MIDC Pawane  
New Mumbai 400 705, India  
Ph: +91 22 4157 8800  
[india@thermofisher.com](mailto:india@thermofisher.com)

#### China

+Units 702-715, 7th Floor  
Tower West, Yonghe  
Beijing, China 100007  
Ph: +86 10 84193588  
[info.eid.china@thermofisher.com](mailto:info.eid.china@thermofisher.com)

#### Europe

Ion Path, Road Three,  
Winsford, Cheshire CW73GA  
UK Ph: +44 1606 548700  
Fax: +44 1606 548711  
[sales.epm.uk@thermofisher.com](mailto:sales.epm.uk@thermofisher.com)

Find out more at [thermofisher.com/410iQ](http://thermofisher.com/410iQ)  
[thermofisher.com/iQSeries](http://thermofisher.com/iQSeries)

**ThermoFisher**  
SCIENTIFIC